

杰克缝纫机
全球销量遥遥领先

400-8876-858
www.chinajack.com



2019年9月版

杰克缝纫机股份有限公司

浙江省台州市椒江区机场南路15号
电话:0086-576-88177788 88177789
传真:0086-576-88177758

JACK SEWING MACHINE CO.,LTD.

No.15 Airport South Road Jiaojiang District Taizhou Zhejiang PRC
TEL:0086-576-88177788 88177789
FAX:0086-576-88177758



自动橡筋拼接机

AUTOMATIC ELASTIC SEWING MACHINE



JK-T1906GPA-D

JK-T1906GPA-D

品名：自动橡筋拼接机
Item: Automatic Elastic Sewing Machine
特性：自动裁剪自动送料、产量提升6倍
Features: Auto cutting; Auto feeding;
Output increased 6 times

高效率 & 1台机器=5个人工 Easy to operate & High efficiency

- 1 全自动测量、切断、缝制，超高生产效率，降低了操作时对于专业技能的要求。
- 2 削减了接橡筋工程需要的人力，一个无专业技能的操作工人可以独立操作4-6台机器。
- 1 Automatic measurement, cutting, sewing, high production efficiency, reducing the operation of the professional skills requirements.
- 2 Reducing the labor required for elastic cutting and joining, a non-skilled operator can operate 4-6 machines independently.


品质均一&稳定高效 Quality uniformity & stable and efficient

- 1.稳定的缝制尺寸，可提高后道工艺效率。
- 2.把原材料的浪费减到最小，从始至终均可获得稳定的高品质、高产量。
- 1.Stable sewing size can improve the efficiency of elastic joining.
- 2.To minimize the waste of raw materials, increase the production output and quality.




1 进口SMC电气配件，运行速度更快 Imported SMC electrical parts, fast operating speed

本机采用进口SMC伺服马达与气缸相结合，运动方式更快更合理，同时耐久性远远高于同类型产品。
Imported SMC servo motor and air cylinder makes working fast and reasonable, long service life.

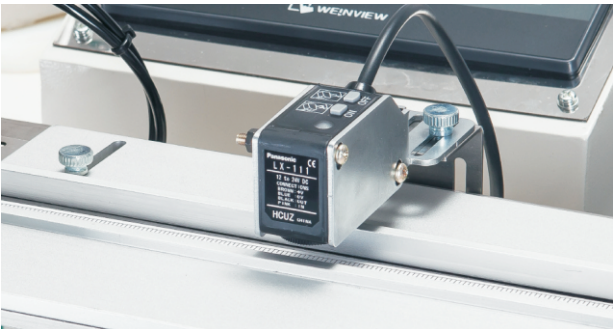

2 LOGO定位功能 Logo sensor

通过颜色定位系统，可精确定位单个、多个logo位置，同时具有绝佳性价比。
Through different color to positioning single logo, multi-logos which has best cost performance.

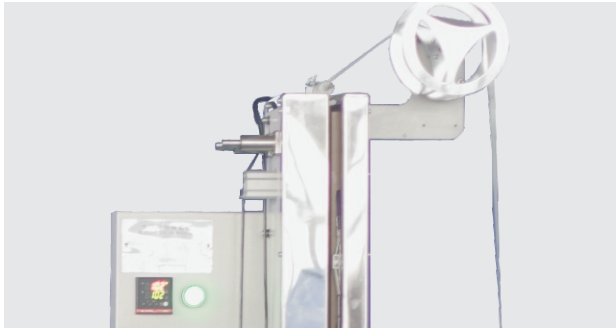


3 定型/送料装置 Shape and feeding device

采用重力原理，使橡筋带自动垂直定型，去除原材料折印，使成品更加美观，同时更有加热预缩功能。
Adopting gravity theory makes elastic vertical shaping and remove folding mark. Meanwhile, it has heating and preshrunk function.



4 区分大小码功能 Different size

本功能针对logo定型，一个码浪费原材料过多而设计，可做完一个大码再做一个小码，大大节约了材料，为服装厂节省大量资金。
Elastic with logo, when you make one size and have to waste material, you can use our machine to make two sizes to save the cost.

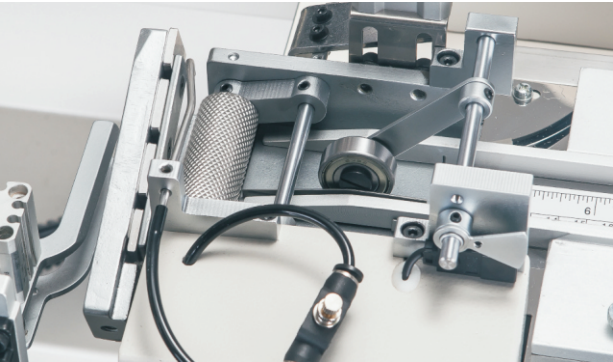

5 自动过结头功能 Joint sensor

橡筋带采用订书针、胶带连接时可自动感应，自动排除，可节省材料，节省人工，同时对切刀机头有保护作用。
Elastic is always used staple or tape for the joint, when the joint goes through the sensor, machine will cut the joint and go on working.



7 超大触控彩屏，操作方便 Touch panel, easy to operate

99%以上功能只需要通过参数调整，无需和同类产品一样要进行机械调整，大大提高效率，降低操作难度。
You only need to set the specification on the panel.



6 收料功能 Elastic collection

可根据需要设定每捆数量，自动收料，非常方便、节省时间，提高效率。
You can set the quantity for every rod by yourself.



8 先进装置，对料齐整 Advance device, nest side

采用前挡后推气缸，保证每条成品整齐美观。
Adopting front block and back push air cylinder, make sure that every product with neat side.

机型 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	X向缝制范围 (mm) X Direction Sewing Range (mm)	Y向缝制范围 (mm) Y direction Sewing Range (mm)	拼接宽度 (mm) Splice Width (mm)	拼接长度 (mm) Splice Length (mm)	压脚高度 (mm) Presser Foot Lifting Height (mm)	最高转速 (s.p.m) Max. Speed (mm)	体积 (mm) Volume (mm)	重量 (kg) Weighe (kg)
JK-T1906GPA-D	自动橡筋拼接机 Automatic Elastic Sewing Machine	DP×17 14#	1	2	60	50	8-50	17-9999	13	2700	1240×1220×1600	260/280